

HEM25ED EXTENDED EXCAVATOR DRILL



- 40-Foot Single-Pass Depth
- Powered by the Excavator
- Soil Nails, Micropiles




HEM25ED EXTENDED EXCAVATOR DRILL



- 40 ft total depth,
25' stroke with one 15' Rod-Adder
- RDS550 Rotary Head
5,000 lbf-ft of Torque
- PCFH25 Heavy-Duty Mast
12,000 lbf of Pullback
- Mounted on a 20-Ton or larger Excavator
- Hydraulic Flow 45 gpm (170 lpm)
- Hydraulic Pressure 3000 psi (207 bar)
- Weight 7,716 lbm (3,500 kg)

HEM25ED EXTENDED EXCAVATOR DRILL

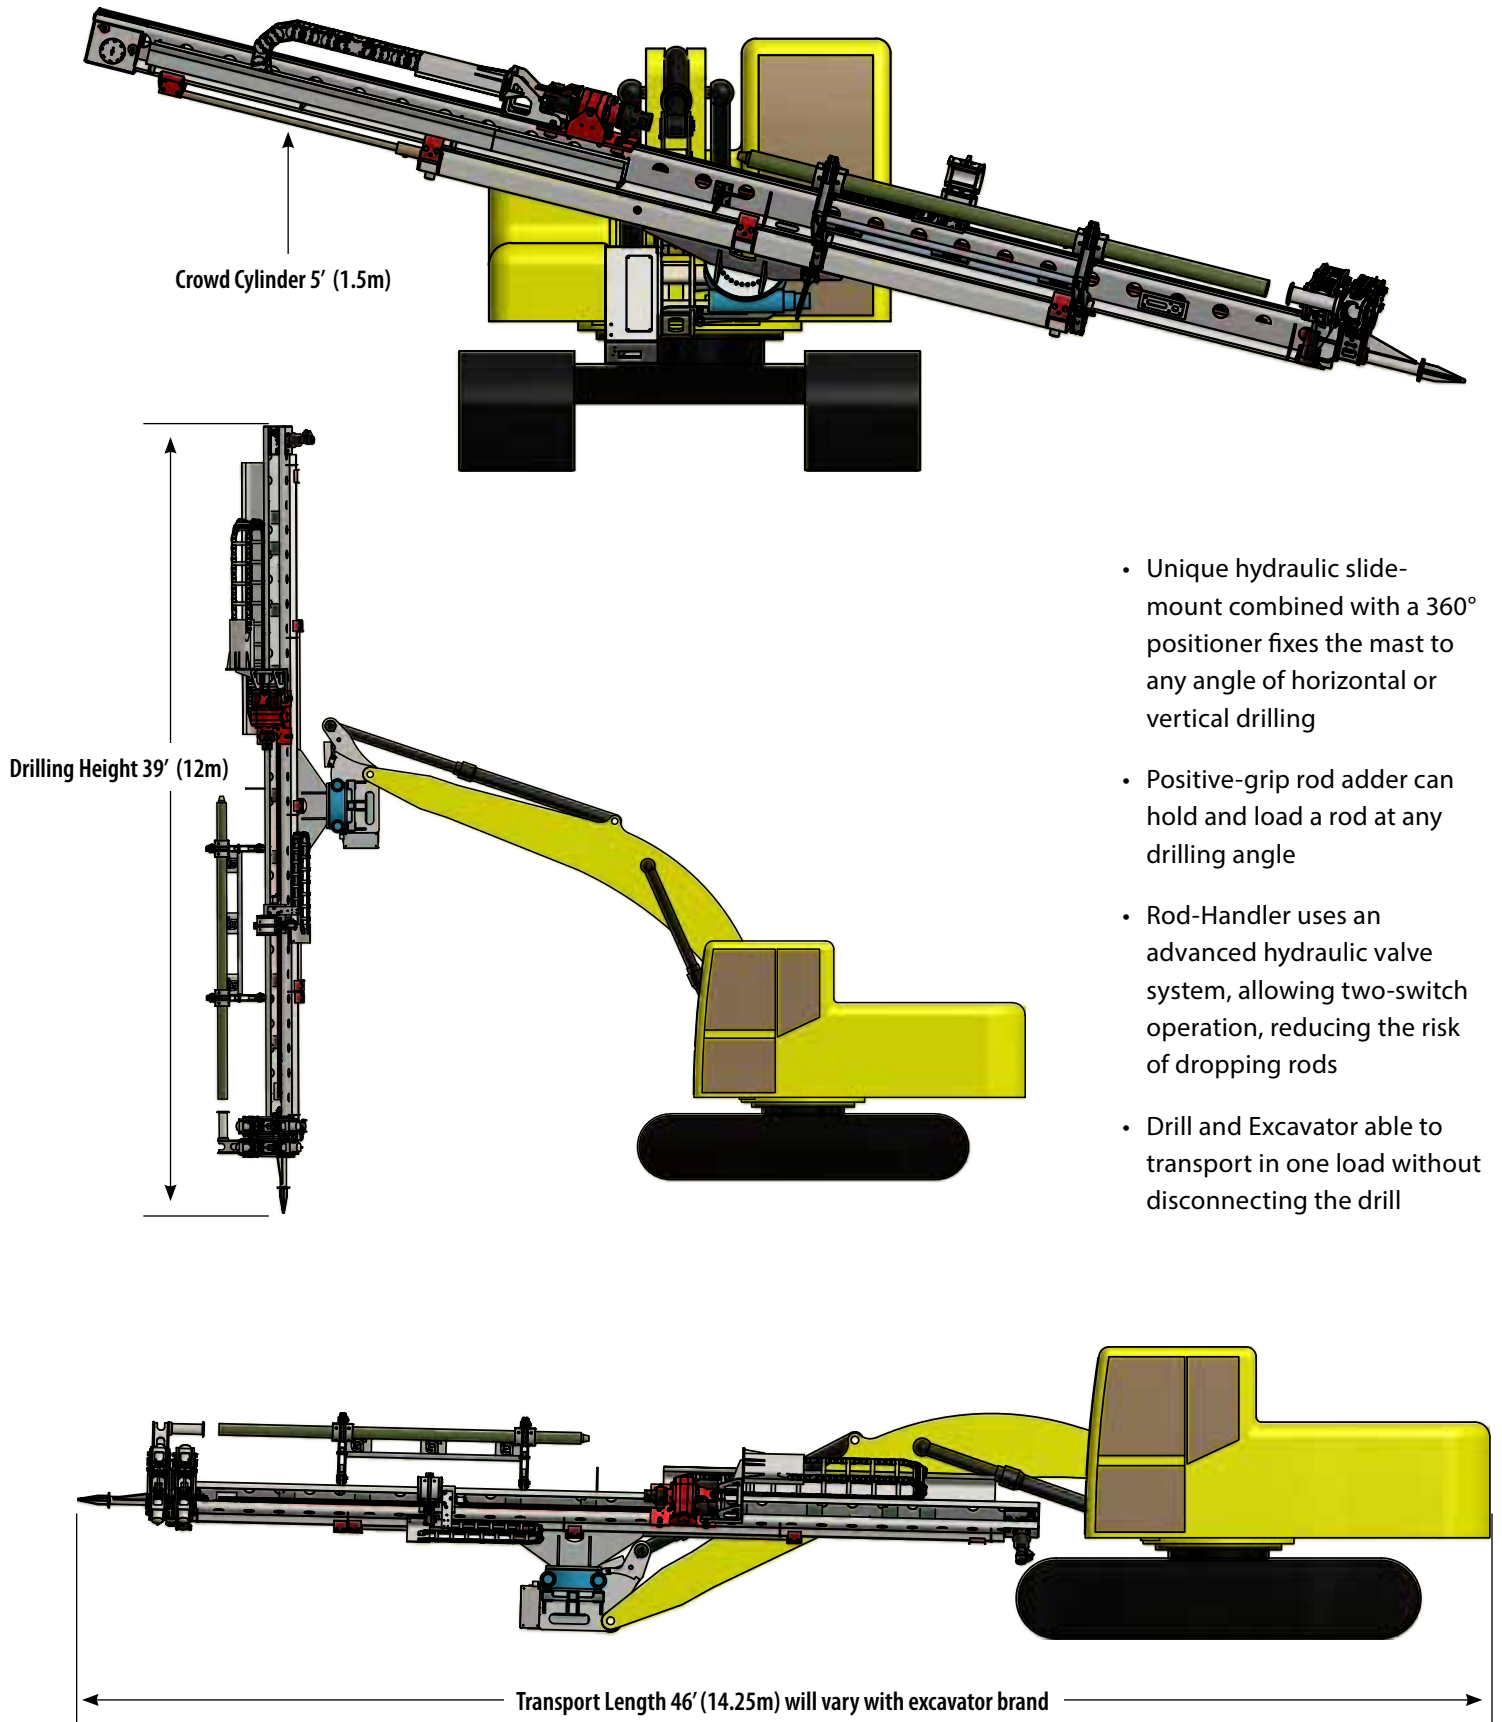



RDS550 Rotary Head

- 5,000 lbf-ft torque
- Multiple Outputs



TE560 Hydraulic Drifter

- Automatic Stroke Adjustment
- High Torque for Hollow Bars

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
TEI TECHNICAL SPECIFICATIONS CONSIDER A 40% HYDRAULIC POWER LOSS.

A WORLD LEADER IN DRILLING ATTACHMENTS, LIMITED ACCESS DRILLS & HYDRAULIC DRIFTERS

TEI Rock Drills is an international leader in the design and manufacture of Drilling Attachments, Limited Access Drills and Drill Rig Components.

TEAM TEI delivers value to our customers with innovative, safe products on the cutting-edge of technology.

